

ARGENTA

Etienne

Etienne is a rectified porcelain with an authentic French limestone look. The graphic variation includes a mix of different limestone finishes - aged and waxed - including some pieces that have oxidation marks caused by exposure to sun and rain. The final look is impactful and, at its competitive price point, this series is a true value.




White (AAEEWE/1224)



Ivory (AAEEIY/1224)



Greige (AAEEGE/1224)

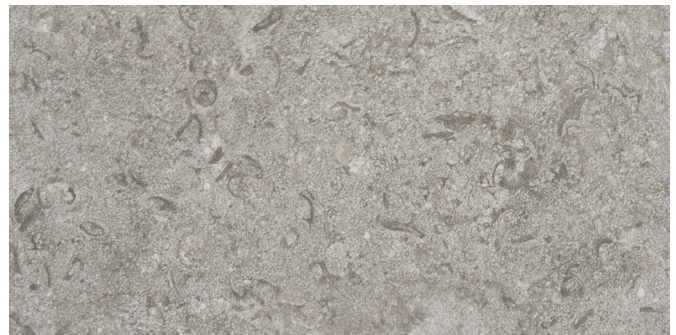

Nut (AAEENT/1224)

Colors are intended as a guide only and may vary from actual tile. Sizes listed are nominal. Please check samples before making final selection and to get actual dimensions for layout. See reverse side for additional product information.

Colors

| | |
|--------|--------|
| Greige | AAEEGE |
| Ivory | AAEEIY |
| Nut | AAEENT |
| White | AAEEWE |

Size (Rectified)

| | |
|---------|-------------|
| 12 x 24 | AAEE--/1224 |
|---------|-------------|

Trim

The surface bullnose is made from field tile that is cut, ground and reglazed.

| | |
|-------------------------|------------|
| 3 x 24 Surface Bullnose | AAEE--/SBN |
|-------------------------|------------|

Usage

Etienne is suitable for residential and light duty commercial applications.

Installation

Most Italian manufacturers recommend a maximum offset of 8" (20 cm) on all large format tiles when setting a running bond. Please refer to ANSI requirements for setting large format tiles, ANSI A 108.2 section 4.3.8.

To attain the proper mix of graphics and color it is important to pull from multiple boxes during installation, rotate pieces, and note the placement of the different images to get the proper final blend.

Physical Properties

| Physical Properties | Norms | Value |
|--|-----------|---|
| FLEXION RESISTANCE | 10545-04 | $R \geq 35 \text{ N/mm}^2$ (average value) |
| Water Absorption | 10545-03 | $\leq 0,05$ |
| Frost Resistance | 10545-12 | Resistant |
| Slip Resistance | DIN 51130 | R10 B |
| PEI | 10545-7 | 4 |
| ** Dynamic (DCOF) Coefficient of Friction | DCOF | Wet ≥ 0.42 |

** These results are for the natural finish and for the normal productions; if there is concern about a particular production, it should be tested. The Coefficient of Friction is a general guide only. Testing may vary with different production runs and with different testing labs.

As noted in the Americans with Disabilities Act (ADA) the coefficient of friction varies considerably due to facts not under the control of entities such as the manufacturers and distributors. These factors include, but are not limited to, contaminants, slope of terrain, drainage conditions, adjacent surfaces, etc. Suitability for any installation can only be determined by a site examination of all conditions that could affect the slip resistance of the tile being installed. Continual cleaning and maintenance must be performed once the tile has been installed.