
DECO ANTHOLOGY

Elios, a leader in bringing the cementine tradition to porcelain, presents their next generation of decorative tile. This rich, new anthology includes often requested patterns and motifs that come from different times and places. The color palette includes the classic combination of black, white and grey and also expands into new territory offering a warm taupe, a gentle light blue and a serene aqua. Together these decos are a collection that was painstakingly curated with today's tastes in mind.

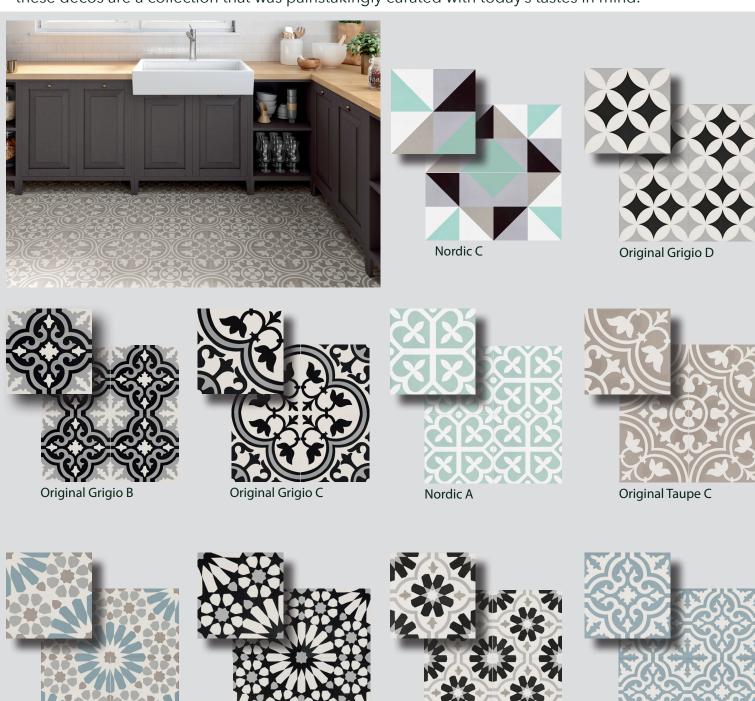

Etnic Nero C

Original Light Blue B

Etnic Black & White B

Etnic Light Blue B

Sizes - Non-Rectified 8 x 8 Field ESDAWE/88

Field Colors

White **ESDAWE**

Decos

8 x 8 Deco Anthology



Original Grigio B ESDAOL/88GB



Original Grigio C ESDAOL/88GC



Original Grigio D ESDAOL/88GD



Original Taupe C ESDAOL/88TC



Original Light Blue B Nordic A ESDAOL/88LBB



ESDANC/88A



Nordic C ESDANC/88C



Etnic Nero C ESDAEC/88NC

Coordinating Trim


Expect shade variation between field and bullnose.

2 1/2 x 8 Surface Bullnose ESDAWE/SBN

Many different patterns are possible with Nordic C, here are a few possibillites.




Same Position Repeated



Green and Black Bowties



Random Placement



Green Diamonds and Windmill

Original C (ESDAOL/88TC & ESDAOL/88GC) needs 4 pieces to complete each pattern.

Nordic C (ESDANC/88C) can be set many ways. In fact, the orientation of the pieces can create quite different effects. It is important and recommended that you orient the pieces the way you want them in a dry layout before installation.



Etnic Light Blue B ESDAEC/88LBB



Etnic Black & White B ESDAEC/88BWB

Usage & Installation

Deco Anthology is suitable for walls and floors including residential and moderate commercial use. Please note that some patterns are complete within a single piece of tile while others need four tiles to complete each pattern. For the designs that require four pieces, Original Grigio C, Original Taupe C, Etnic Light Blue B & Etnic Black & White B, care should be taken during installation to make sure the tiles are correctly placed to achieve the desired final look. The minimum recommended grout joint is 3/32". Please note that the material is non-rectified. If using more than one item together (i.e. field and decos), please check the caliber and be aware that you may have to adjust the size of the grout joint to make your pattern work.

Technical Information

Physical Properties	Norms	Value	Physical Properties	Norms	Value	
Water Absorption	10545-3	≤0.5% Conforms	Resistance to Surface Abrasion	10545-7	WE	PEI 5
Frost Resistance	10545-12	Resistant			Decos	PEI 4
Slip Resistance	DIN51130R	R10	The Coefficient of Friction is a general guide only. For more information see our current handout Americans with Disabilities Act and Slip Resistance of Tile.			
Dynamic (DCOF) Coefficient of Friction	DCOF	≥ 0.42 Wet				

The Coefficient of Friction is a general guide only. Testing may vary with different production runs and with different testing labs. As noted in the American with Disabilities Act (ADA) the coefficient of friction varies considerably due to facts not under the control of entities such as the manufacturers and distributors. These factors include, but are not limited to, contaminants, slope of terrain, drainage conditions, adjacent surfaces, etc. Suitability for any installation can only be determined by a site examination of all conditions that could affect the slip resistance of the tile being installed. Continual cleaning and maintenance must be performed once the tile has been installed.

